

Thank you for selecting this light fitting. All products are thoughtfully designed and manufactured. To get the most from your new light please read these instructions fully. Some experience of electrical wiring and do-it-yourself is useful to install the product, however we do recommend that you use a qualified electrician to fit the light.

The light fitting should be installed in accordance with the UK building Regulations, Part P and current IEE Wiring Regulations.

Contents

- 1 x Light Fitting
- 1 x Fixing pack
- 1 x Glass shade

Safety First!

This light fitting is suitable for indoor use only. It should not be fitted to newly painted or plastered surfaces as this may cause discolouration of the finish.

For your safety, please observe the following:

Important!

- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class 2 = therefore no earth is required and should be fitted to a lighting supply protected by a 5 amp fuse or equivalent circuit breaker.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Before starting

Please read through these instructions before commencing work, and keep them for future reference.

Fixing instructions

Make sure you have the following items which are required to install this light fitting:

- Two screwdrivers one suitable for a slotted screw and one suitable for a cross-headed screw
- Small electrical screwdriver
- Insulating tape
- Small pliers with cutter or insulation stripper


Warning: Before commencing installation, isolate the mains supply.

To Install the Fitting

1. Ensure the house electricity supply is off at the fuse board.
 2. Before removing the existing fitting, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
 3. Remove the mounting bracket from the ceiling cup by undoing the retaining screws, retain the screws and any washers for later.
 4. Using the mounting bracket as a template, mark and then drill the fixing holes in the ceiling. Ensure that the holes are drilled into a joist or other suitable mounting and not just the plaster board.
 5. **This fitting is height adjustable at point of installation only. No attempt must be made to adjust the height once it has been attached to the ceiling.** If adjustment is required at a later date the fitting must be isolated from the mains and removed from the ceiling first. Using two pairs of pliers carefully open the chain links and remove the required number of links. Close the links. Note: Cloth should be used between the jaws of the pliers to protect the decorative finish. Pull any excess cable through the ceiling cup.
IMPORTANT: ensure the chain is supporting the weight of the fitting and not the electrical cable.
 6. Attach the mounting bracket onto the ceiling using suitable fixings. Ensure the screws are firmly fixed into a joist or other suitable mounting and not just the plasterboard.
 7. Use a screwdriver to lever open the connector block housing and feed supply cable through the rubber sleeve. Whilst supporting the weight of the fitting, make electrical connections as follows:
 - Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
 - Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.**Please note: No earth should be connected to any part of this fitting. If any earth wires are present please terminate these in a separate terminal block (not supplied) to ensure that continuity is maintained for the earth circuit.** Ensure electrical connections are tight and no loose strands of wire are left out of the terminal block.
- Check that.....**
- You have correctly identified the house wires for the light fitting.
 - Connections are tight.
 - No loose strands have been left out of the connection block(s).
8. Fit any excess wires into ceiling void if required, offer the ceiling cup onto the mounting bracket until the fixing holes are aligned then secure ceiling cup into position with screws removed earlier. **Take care not to trap wires in the process.**
 9. **Fitting the shade:** Remove the plastic shade ring already attached to the lamp holder. Position the shade over the top of the lamp holder section and screw the shade ring into place to secure the glass shade. Take care not to over tighten as this may cause damage to the fitting. Ensure that the fitting is fully secured before leaving unattended.
 10. **Selecting the correct light bulb**
Fit the bulb: type and wattage as indicated on the fitting. The wattage indicated must not be exceeded

11. **Switch on!**

You may now switch the electricity back on. We are sure you will be pleased with your new light fitting.

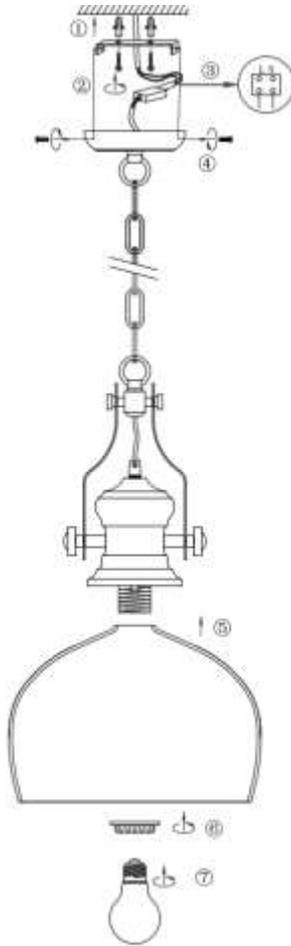

Cleaning care

We recommend cleaning with a soft dry cloth.
Don't use abrasive materials as these may affect the finish.


Safety information

For your safety, please remember the following:
Always switch off the supply before changing lightbulbs or cleaning.
Allow bulbs to cool down before handling.
If the external flexible cable of this luminaire is damaged, it must be replaced by a suitably qualified person in order to avoid hazard. DO NOT use or attempt to repair the product.

Issue 01/05/17

MATALAN

— home —

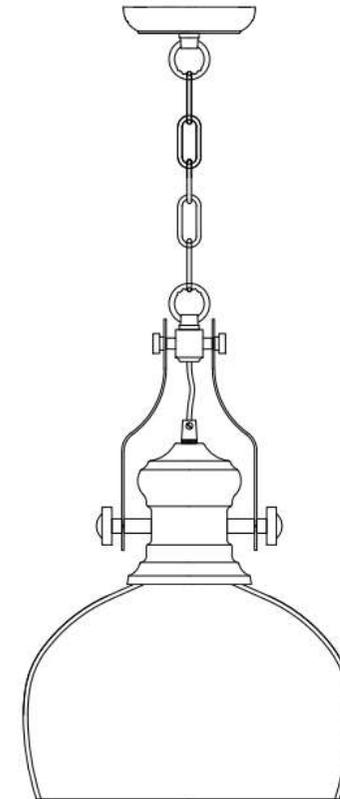

AUBREY PENDANT

INSTRUCTIONS